

AD-A048 557

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
PYROELECTRIC DETECTOR, (U)
AUG 77 S D PELTZ

F/G 14/2

UNCLASSIFIED


FTD-ID(RS)T-1136-77

NL

1 OF 1
AD
A048557



END
DATE
FILMED
2- 78
DDC



NATIONAL BUREAU OF STANDARDS
MICROCOPY RESOLUTION TEST CHART

AD-A048557

FOREIGN TECHNOLOGY DIVISION




①

PYROELECTRIC DETECTOR

by

S. D. Peltz



Approved for public release;
distribution unlimited.



EDITED TRANSLATION

FTD-ID(RS)T-1136-77

3 August 1977

MICROFICHE NR. *FTD-77-C-000985*

PYROELECTRIC DETECTOR

By: S. D. Peltz

English pages: 4

Source: USSR Patent 277315, 22 July 1970,
pp. 1-2.

Country of origin: USSR

Translated by: Marilyn Olachea

Requester: USAMRDC

Approved for public release, distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP.AFB, OHIO.

U. S. BOARD ON GEOGRAPHIC NAMES transliteration SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	А а	A, a	Р р	Р р	R, r
Б б	Б б	B, b	С с	С с	S, s
В в	В в	V, v	Т т	Т т	T, t
Г г	Г г	G, g	У у	У у	U, u
Д д	Д д	D, d	Ф ф	Ф ф	F, f
Е е	Е е	Ye, ye; E, e*	Х х	Х х	Kh, kh
Ж ж	Ж ж	Zh, zh	Ц ц	Ц ц	Ts, ts
З з	З з	Z, z	Ч ч	Ч ч	Ch, ch
И и	И и	I, i	Ш ш	Ш ш	Sh, sh
Й й	Й й	Y, y	Щ щ	Щ щ	Shch, shch
К к	К к	K, k	Ъ ъ	Ъ ъ	"
Л л	Л л	L, l	Ы ы	Ы ы	Y, y
М м	М м	M, m	Ь ь	Ь ь	'
Н н	Н н	N, n	Э э	Э э	E, e
О о	О о	O, o	Ю ю	Ю ю	Yu, yu
П п	П п	P, p	Я я	Я я	Ya, ya

*ye initially, after vowels, and after Ъ, Ь; e elsewhere.
 When written as ë in Russian, transliterate as yë or ë.
 The use of diacritical marks is preferred, but such marks may be omitted when expediency dictates.

GREEK ALPHABET

Alpha	A	α	α	Nu	N	ν
Beta	B	β		Xi	Ξ	ξ
Gamma	Γ	γ		Omicron	Ο	ο
Delta	Δ	δ		Pi	Π	π
Epsilon	E	ε	ε	Rho	Ρ	ρ ϑ
Zeta	Z	ζ		Sigma	Σ	σ ς
Eta	H	η		Tau	Τ	τ
Theta	Θ	θ	θ	Upsilon	Υ	υ
Iota	I	ι		Phi	Φ	φ φ
Kappa	K	κ	κ	Chi	Χ	χ
Lambda	Λ	λ		Psi	Ψ	ψ
Mu	M	μ		Omega	Ω	ω

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English
---------	---------

sin	sin
-----	-----

cos	cos
-----	-----

tg	tan
----	-----

ctg	cot
-----	-----

sec	sec
-----	-----

cosec	csc
-------	-----

sh	sinh
----	------

ch	cosh
----	------

th	tanh
----	------

cth	coth
-----	------

sch	sech
-----	------

csch	csch
------	------

arc sin	\sin^{-1}
---------	-------------

arc cos	\cos^{-1}
---------	-------------

arc tg	\tan^{-1}
--------	-------------

arc ctg	\cot^{-1}
---------	-------------

arc sec	\sec^{-1}
---------	-------------

arc cosec	\csc^{-1}
-----------	-------------

arc sh	\sinh^{-1}
--------	--------------

arc ch	\cosh^{-1}
--------	--------------

arc th	\tanh^{-1}
--------	--------------

arc cth	\coth^{-1}
---------	--------------

arc sch	sech^{-1}
---------	----------------------------

arc csch	csch^{-1}
----------	----------------------------

rot	curl
-----	------

lg	log
----	-----

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

PYROELECTRIC DETECTOR

S. D. Peltz

This is an invention in field of measurement technology.

Known are pyroelectric radiation detectors which contain a sensitive element with two electrodes, which are sprayed onto a surface and are perpendicular to the direction of polarization. When such a pyrodetector is exposed to a radiant flux, the information obtained does not provide information on the coordinate of focus radiation.

The proposed pyroelectric detector is distinguished from the

above by the fact that the electrodes, which are applied to the sensitive element, are arranged on the plane parallel to the direction of spontaneous polarization, and one of them is made in the form of a strip directed perpendicular to the direction of polarization.

This makes it possible to obtain the coordinate sensitivity of the detector in the direction of polarization.

Figure 1 shows the design of the proposed pyroelectric detector. Figure 2 shows for a fixed moment in time the curve representing the dependence of the potential on distance, which is reckoned from the origin of the coordinates in the direction of the axis of spontaneous polarization, which coincides, for example, with the X-axis.

On pyroelectric element 1, which is made, for example, of a triglycerine sulfate crystal and takes the direction of spontaneous polarization (indicated by an arrow), continuous electrode 2 is applied. It serves simultaneously as an absorption coating. The second electrode 3 is a narrow strip, which is perpendicular to the direction of spontaneous polarization. The distribution of potential ϕ on a pyroelectric element with a single electrode, caused by the absorption of the heat flux focused at the spot, is subject to the following formula:

$$\varphi(\rho, \psi) = \frac{A \gamma \rho d^2 \sin(\omega t - a) \cos \psi \exp(-a)}{\varepsilon(\rho^2 + d^2)^{3/2}}$$

where ρ, ψ are variables in the cylindrical coordinate system, A - constant related to specific power of liberated heat, γ - pyrocoefficient, ε - dielectric constant, d - crystal thickness, ω - modulation frequency of thermal flux, a - phase shift between modulation of thermal flux and potential.

The detector works as follows.

If the radiation spot is to the left of electrode 3, then the pyroelectric signal has a single sign. When the spot moves in the direction of spontaneous polarization from left to right, electrical signal gradually decreases to zero, and then changes its sign.

The curve (see Fig. 2) shows that within the limits of distance CD the detector does supply information on the coordinate.

Object of the Invention

The pyroelectric detector, which contains a polarized sensitive element and two electrodes arranged on opposite sides of the

sensitive element, is distinguished by the fact that in order to obtain the coordinate sensitivity of the detector in the direction of polarization, its electrodes lie in the plane parallel to the direction of polarization. One of them takes the form of a strip directed perpendicular to the polarization direction.

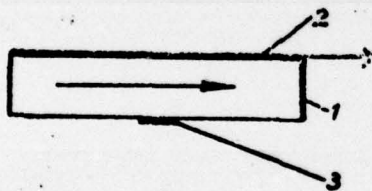


Fig. 1.

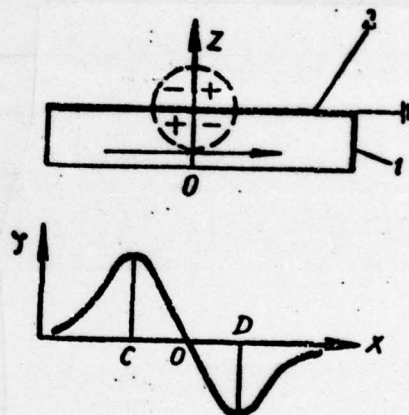


Fig. 2.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FTD-ID(RS)T-1136-77	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PYROELECTRIC DETECTOR		5. TYPE OF REPORT & PERIOD COVERED Translation
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) S. D. Peltz		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Foreign Technology Division Air Force Systems Command U. S. Air Force		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE 22 July 1970
		13. NUMBER OF PAGES 4
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) 18, 09		

ACCESSION FOR	
HTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/ RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
C557 USAIIC	1	NIA/PHS	1
C591 FSTC	5	NICD	5
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		